
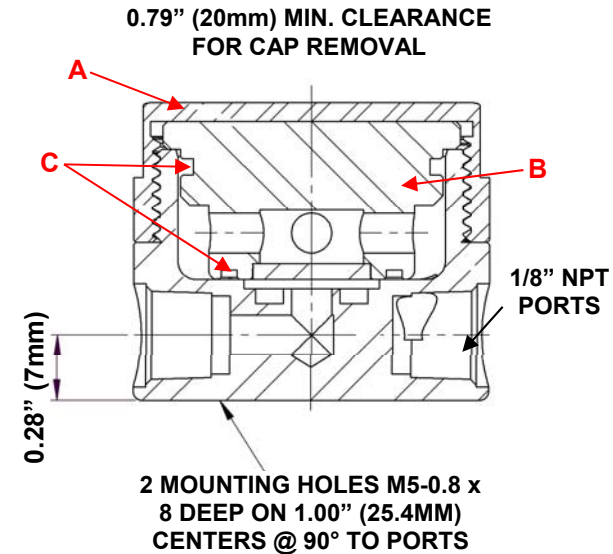



Model: GMS050

Replacement Parts List

MT.19.M1	Low Flow Replacement Kit – 0.1 Micron <small>(Includes 5 PTFE Membranes, and Viton O-Rings)</small>
MT.19.M2	High Flow Replacement Kit – 0.8 Micron <small>(Includes 5 PTFE Membranes, and Viton O-Rings)</small>
GMS050-C	Stainless Steel Cap (A)
GMS050-Plug	Stainless Steel Plug Insert (B)
SSGMS050	Stainless Steel Support Disc (Not Pictured)
PTGMS050	PTFE Support Disc (Not Pictured) <small>Used on Hastelloy, Monel, and PTFE Housings</small>
Oxygen Cleaning Service Available	
Available O-Rings	
BNGMS050	Buna-N (Set of 2)
GVGMS050	Viton (Standard) (Set of 2) (C)
KZGMS050	Kalrez (Set of 2)
GEGMS050	EPDM (Set of 2)

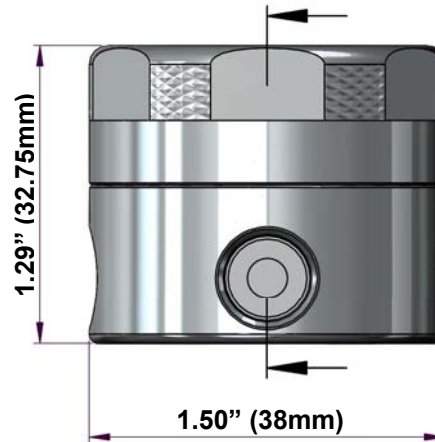

Please Note: Exotic Materials are available, for Hastelloy-C (GMS050HC), Monel (GMS050M), and PTFE (GMS050P).

 United Filtration Systems, Inc. 6558 Diplomat Drive Sterling Heights, MI 48314 1-800-311-5561 www.unitedfiltration.com	Model GMS050		THE COPYRIGHT OF THIS DRAWING IS RESERVED BY UNITED FILTRATION. IT IS ISSUED ON CONDITION THAT IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PART EITHER WHOLLY, OR IN PART WITHOUT CONSENT IN WRITING.
	Material: Head: 316L Stainless Steel Bowl: 316L Stainless Steel Internals: 316L Stainless Steel Standard Gasket / O-ring: Viton	Drain Type: 1/8" FNPT Maximum Temperature: 300°F Maximum Pressure: 1500 PSIG Internal Volume: 1.5CC (Behind Membrane) Weight: 0.5 lbs.	
DO NOT SCALE DRAWING IF IN DOUBT ASK		Drawn By & Date UFS0922Y	