



Technical Data

- PTFE / Pyrex Glass Bowl Construction
- 1/8" NPT / 1/8" NPT Drain
- 100 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 81CC
- Viton O-Ring (Standard-Included)
- Total Weight: 1 lb.
- Flow Rate @ 100 PSIG: 27 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on 12-57-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop

Elements Available:

12-57-**xxx**

Disposable Borosilicate Glass Microfiber Filter Element

51-230-70CS – Standard Recommended Coalescing Filter Element

SS-12-57-**xxT**

Stainless Steel Filter Element

Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering
Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200

PT-12-57-**xx**

PTFE Filter Element

Micron Sizes: 03 and 25

PEL-12-57-**xx**

PEL (Polyethylene) Filter Element

Micron Sizes: 10, 25, and 75

Replace "**xxx**" with grade or micron needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

GV120PG

Viton (-15°F to 400°F) **Standard - Included******

BN120PG

Buna-N (-40°F to 250°F)

KZ120PG


Perfluoroelastomer (5°F to 600°F)

GS120PG

Silicone (-65°F to 400°F)

GE120PG

EPDM (-65°F to 300°F)

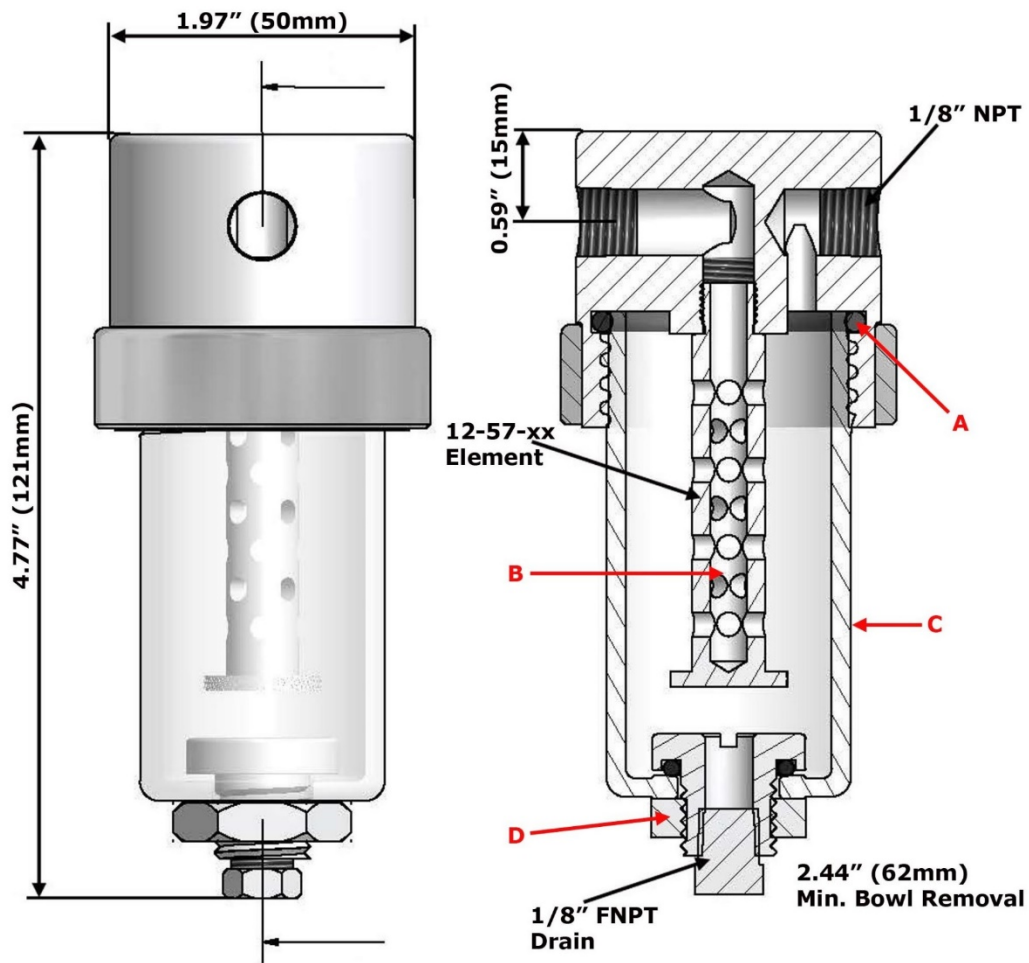

Replacement Parts:

GV120PG	Viton (-15°F to 400°F) (A) **Standard - Included**
TR120P	PTFE Tie Rod w/ Element Retainer (B)
GB120PG	Pyrex Glass Bowl (C)
BHF120PG	PTFE Bulk Head Fitting (D)

Accessories:

MBSS120	Stainless Steel Mounting Bracket (M6 x 12 Full Thread on 1.50" Center @ 90° to Port)
---------	-----------------------------------------------------------------------------------------