



Technical Data

- 316L Stainless Steel Construction
- 1/4" NPT / No Drain
- 1500 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 100cc
- Viton O-Ring (Standard-Included)
- Total Weight: 2.5 lbs.
- Flow Rate @ 100 PSIG: 44 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on 25-64-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop


Elements Available:

| | |
|----------------------|---|
| 25-64- xxx | Disposable Borosilicate Glass Microfiber Filter Element 25-64-70C – Standard Recommended Coalescing Filter Element |
| SS-25-64- xxT | Stainless Steel Filter Element Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200 |
| 25-64- xxxX1 | Reinforced Borosilicate Glass Microfiber Filter Element With Exterior Stainless Steel Cage |
| 25-64- xxxX3 | Reinforced Borosilicate Glass Microfiber Filter Element With Interior & Exterior Stainless Steel Cages |
| PT-25-64- xx | PTFE Filter Element Micron Sizes: 03 and 25 |
| PEL-25-64- xx | PEL (Polyethylene) Filter Element Micron Sizes: 10, 25, and 75 |
| 25-64- xx-TS | Adsorption Cartridge Adsorbents: CC, 4A, 13X, SG, DR, MB, PP, HO, SB, and CS |

Replace "**xxx**" with grade, micron, or adsorbent needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

| | |
|--------------|---|
| GV130 | Viton (-15°F to 400°F) **Standard - Included** |
| BN130 | Buna-N (-40°F to 250°F) |
| KZ130 | Perfluoroelastomer (5°F to 600°F) |
| GS130 | Silicone (-65°F to 400°F) |
| GE130 | EPDM (-65°F to 300°F) |

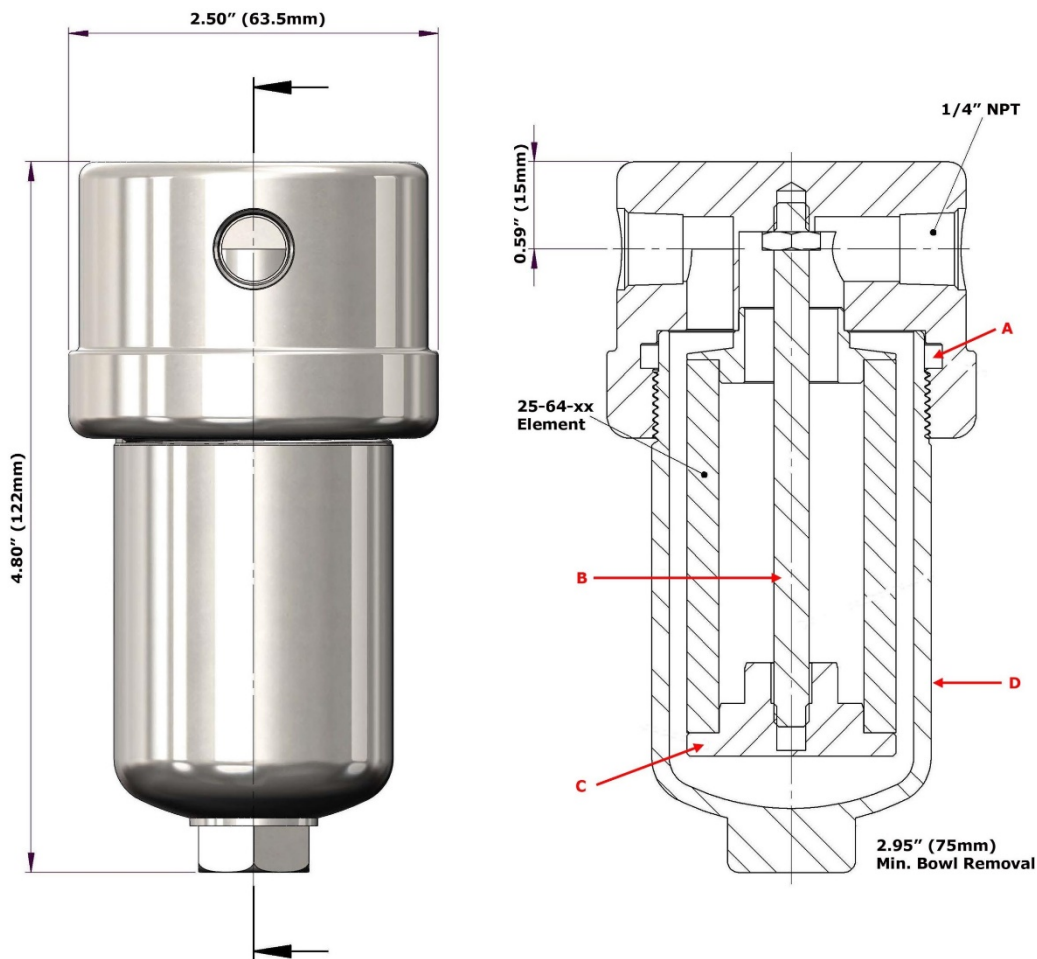

Replacement Parts:

| | |
|--------|---|
| GV130 | Viton (-15°F to 400°F) (A) **Standard - Included** |
| TR130 | Stainless Steel Tie Rod (B) |
| ER130 | Stainless Steel Element Retainer (C) |
| SSB134 | Stainless Steel Bowl (D) |

Accessories:

| | |
|---------|---|
| SC130 | Stainless Steel Support Core |
| MBSS130 | Stainless Steel Mounting Bracket (M6 x 12 Full Thread on 1.50" Center @ 90° to Port) |

Part Number of Exotic Housing Materials:

| | |
|------------------|---|
| Monel A400: | Model 134M (Drawing) |
| Hastelloy C-276: | Model 134HC (Drawing) |
| Inconel A625: | Model 134-INC (Drawing) |