



Model 134VP

Technical Data

- 316L Stainless Steel Construction
- 1/4" NPT / No Drain
- 6000 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 130cc
- Viton O-Ring (Standard-Included)
- Total Weight: 10.5 lbs.
- Flow Rate @ 100 PSIG: 44 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on 25-64-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop

Elements Available:

25-64-**xxx**

Disposable Borosilicate Glass Microfiber Filter Element

25-64-70C – Standard Recommended Coalescing Filter Element

SS-25-64-**xxT**

Stainless Steel Filter Element

Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering
Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200

25-64-**xxxX1**

Reinforced Borosilicate Glass Microfiber Filter Element

With Exterior Stainless Steel Cage

25-64-**xxxX3**

Reinforced Borosilicate Glass Microfiber Filter Element

With Interior & Exterior Stainless Steel Cages

PT-25-64-**xx**

PTFE Filter Element

Micron Sizes: 03 and 25

PEL-25-64-**xx**

PEL (Polyethylene) Filter Element

Micron Sizes: 10, 25, and 75

25-64-**xx-TS**

Adsorption Cartridge

Adsorbents: CC, 4A, 13X, SG, DR, MB, PP, HO, SB, and CS

Replace "**xxx**" with grade, micron, or adsorbent needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

GV130VP

Viton (-15°F to 400°F) **Standard - Included**

BN130VP

Buna-N (-40°F to 250°F)

KZ130VP



Perfluoroelastomer (5°F to 600°F)

GS130VP

Silicone (-65°F to 400°F)

GE130VP

EPDM (-65°F to 300°F)

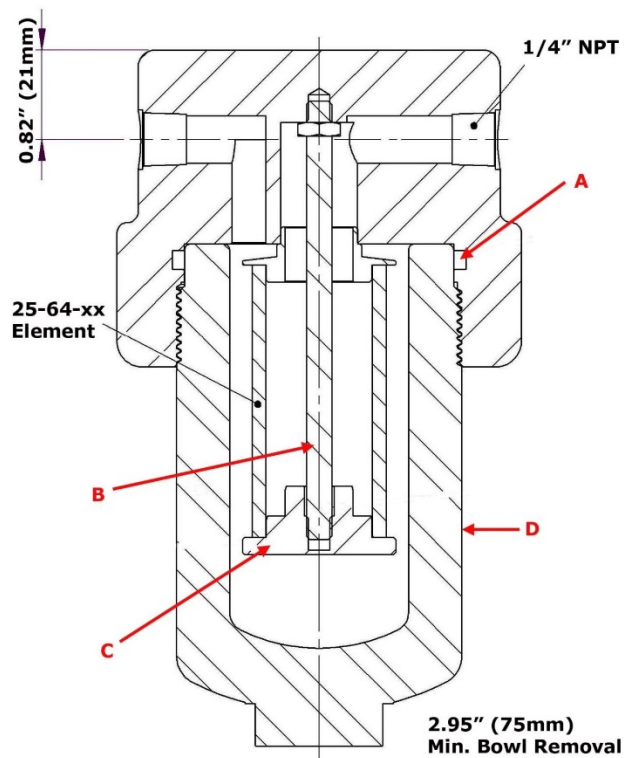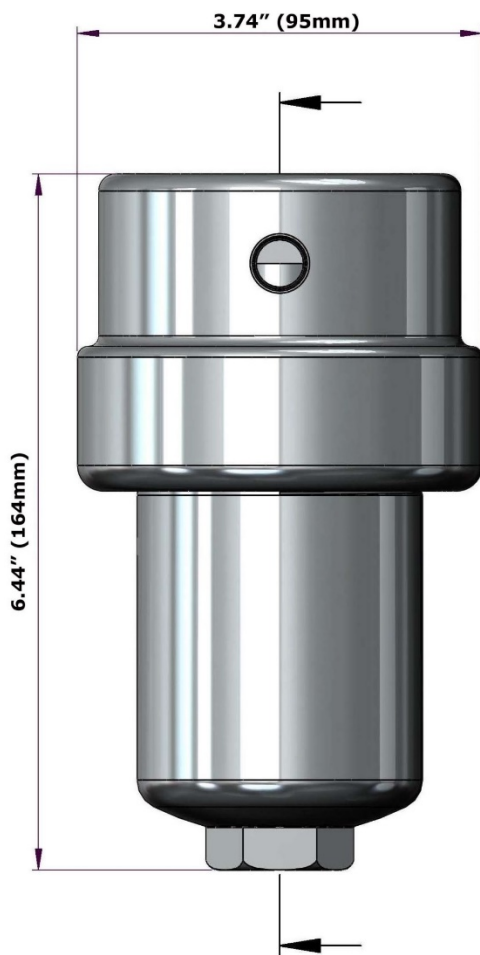

Replacement Parts:

GV130VP	Viton (-15°F to 400°F) (A) **Standard - Included**
TR130VP	Stainless Steel Tie Rod (B)
ER130VP	Stainless Steel Element Retainer (C)
SSB134VP	Stainless Steel Bowl (D)

Accessories:

SC130	Stainless Steel Support Core
MBSS150	Stainless Steel Mounting Bracket (M10 x 15 Full Thread on 2.50" Center @ 90° to Port)

Part Number of Exotic Housing Materials:

Monel A400:	Model 134VPM (Drawing)
Hastelloy C-276:	Model 134VP-HC (Drawing)
Inconel A625:	Model 134VP-INC (Drawing)