



# Model 140VP

## Technical Data

- 316L Stainless Steel Construction
- 1/4" NPT / 1/4" NPT Drain
- 6000 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 270CC
- Viton O-Ring (Standard-Included)
- Total Weight: 15 lbs.
- Flow Rate @ 100 PSIG: 129 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
  - Based on 25-178-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
  - Higher flow rates are supported with increased initial pressure drop


### Elements Available:

25-178- <b>xxx</b>	<b>Disposable Borosilicate Glass Microfiber Filter Element</b> 25-178-70C – Standard Recommended Coalescing Filter Element
SS-25-178- <b>xxT</b>	<b>Stainless Steel Filter Element</b> Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200
25-178- <b>xxxX1</b>	<b>Reinforced Borosilicate Glass Microfiber Filter Element</b> With Exterior Stainless Steel Cage
25-178- <b>xxxX3</b>	<b>Reinforced Borosilicate Glass Microfiber Filter Element</b> With Interior & Exterior Stainless Steel Cages
PT-25-178- <b>xx</b>	<b>PTFE Filter Element</b> Micron Sizes: 03 and 25
PEL-25-178- <b>xx</b>	<b>PEL (Polyethylene) Filter Element</b> Micron Sizes: 10, 25, and 75
25-178- <b>xx-TS</b>	<b>Adsorption Cartridge</b> Adsorbents: CC, 4A, 13X, SG, DR, MB, PP, HO, SB, and CS

Replace "**xxx**" with grade, micron, or adsorbent needed. See [Filter Element Guide](#) for more information.

### Available O-Rings:

<b>GV130VP</b>	<b>Viton (-15°F to 400°F) <b>**Standard - Included**</b></b>
BN130VP	Buna-N (-40°F to 250°F)
KZ130VP	Perfluoroelastomer (5°F to 600°F)
GS130VP	Silicone (-65°F to 400°F)
GE130VP	EPDM (-65°F to 300°F)

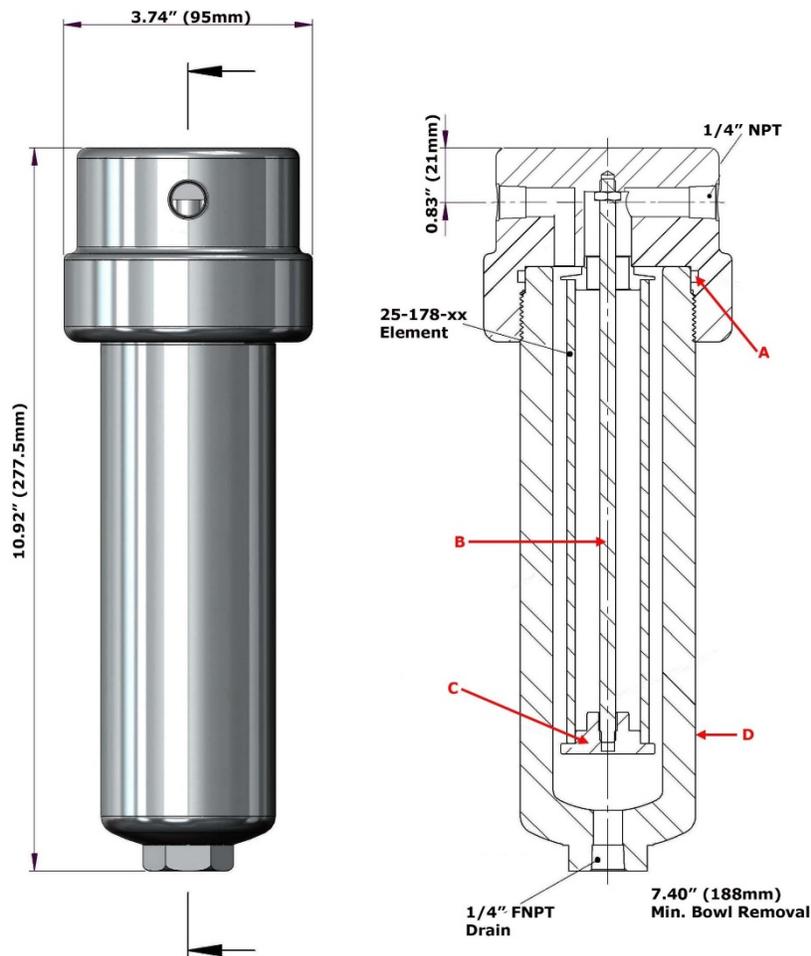

### Replacement Parts:

GV130VP	Viton (-15°F to 400°F) (A) <b>**Standard - Included**</b>
TR140VP	Stainless Steel Tie Rod (B)
ER130VP	Stainless Steel Element Retainer (C)
SSB140VP	Stainless Steel Bowl (D)

### Accessories:

SC140	Stainless Steel Support Core
MBSS150	Stainless Steel Mounting Bracket (M10 x 15 Full Thread on 2.50" Center @ 90° to Port)

### Part Number of Exotic Housing Materials:

- Monel A400: [Model 140VPM \(Drawing\)](#)
- Hastelloy C-276: [Model 140VP-HC \(Drawing\)](#)
- Inconel A625: [Model 140VP-INC \(Drawing\)](#)

