



# Model 148G

## Technical Data

- 316L Stainless Steel / Pyrex Glass Bowl Construction
- 1/2" NPT / 1/4" NPT Drain
- 100 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 260cc
- Viton O-Ring (Standard-Included)
- Total Weight: 3 lbs.
- Flow Rate @ 100 PSIG: 129 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
  - Based on 25-178-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
  - Higher flow rates are supported with increased initial pressure drop


### Elements Available:

25-178-xxx	<b>Disposable Borosilicate Glass Microfiber Filter Element</b> 25-178-70C – Standard Recommended Coalescing Filter Element
SS-25-178-xxT	<b>Stainless Steel Filter Element</b> Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200
25-178-xxxX1	<b>Reinforced Borosilicate Glass Microfiber Filter Element</b> With Exterior Stainless Steel Cage
25-178-xxxX3	<b>Reinforced Borosilicate Glass Microfiber Filter Element</b> With Interior & Exterior Stainless Steel Cages
PT-25-178-xx	<b>PTFE Filter Element</b> Micron Sizes: 03 and 25
PEL-25-178-xx	<b>PEL (Polyethylene) Filter Element</b> Micron Sizes: 10, 25, and 75

Replace "xxx" with grade or micron needed. See [Filter Element Guide](#) for more information.

### Available O-Rings:

GV137	<b>Viton (-15°F to 400°F) **Standard - Included**</b>
BN137	Buna-N (-40°F to 250°F)
KZ137	Perfluoroelastomer (5°F to 600°F)
GS137	Silicone (-65°F to 400°F)
GE137	EPDM (-65°F to 300°F)

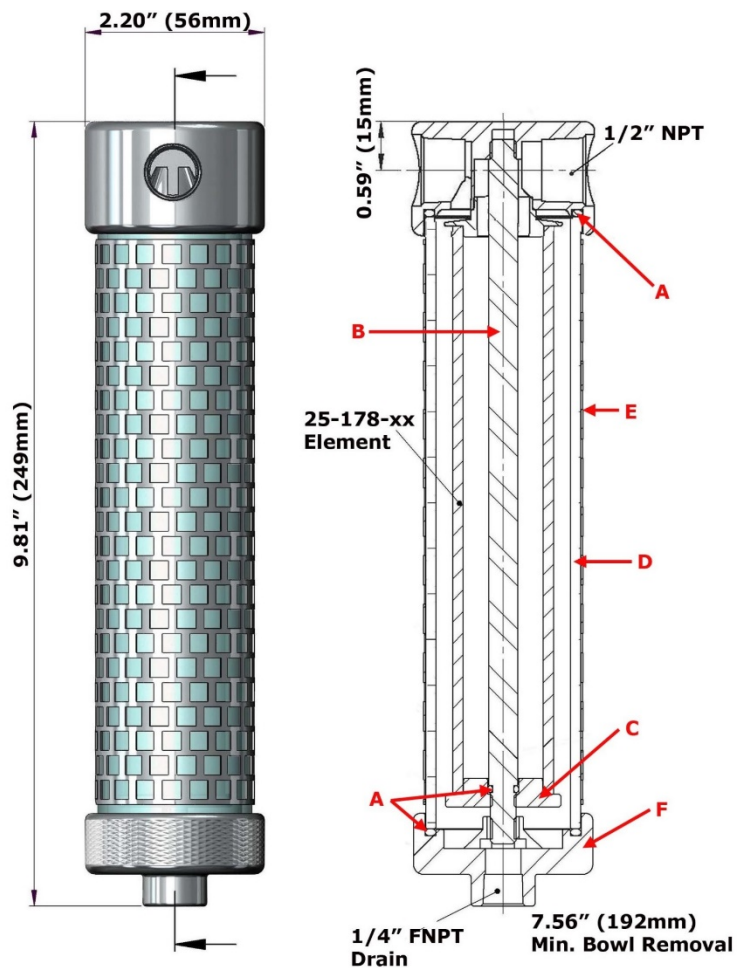

### Replacement Parts:

<b>GV137</b>	<b>Viton (-15°F to 400°F) (A) <b>**Standard - Included**</b></b>
TR147	Stainless Steel Tie Rod (B)
ER137	Stainless Steel Element Retainer (C)
GB147	Pyrex Glass Bowl (D)
BG147	Stainless Steel Bowl Guard (E)
BP137	Stainless Steel Base Plate (F)

### Accessories:

SC130	Stainless Steel Support Core
MBSS130	Stainless Steel Mounting Bracket (M6 x 12 Full Thread on 1.50" Center @ 90° to Port)

### Part Number of Exotic Housing Materials:

<b>Monel A400:</b>	<a href="#">Model 148GM (Drawing)</a>
<b>Hastelloy C-276:</b>	<a href="#">Model 148G-HC (Drawing)</a>
<b>Inconel A625:</b>	<a href="#">Model 148G-INC (Drawing)</a>