



## Technical Data

- Anodized Aluminum Construction
- 1/2" NPT / Brass Manual Petcock Drain
- 500 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 163cc
- Buna-N O-Ring (Standard-Included)
- Total Weight: 1.5 lbs. (Standard Disposable Element Included)
- Flow Rate @ 100 PSIG: 44 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
  - Based on 25-64-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
  - Higher flow rates are supported with increased initial pressure drop

### Elements Available:

25-64-**xxx**

#### **Disposable Borosilicate Glass Microfiber Filter Element**

25-64-70C – Standard Coalescing Filter Element **\*\*Included\*\***

SS-25-64-**xxT**

#### **Stainless Steel Filter Element**

Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering  
Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200

25-64-**xxxX1**

#### **Reinforced Borosilicate Glass Microfiber Filter Element**

With Exterior Stainless Steel Cage

TRE25-64-**xxPLMG**

#### **Pleated Micro Glass Filter Element**

Micron Sizes: 03, 10 and 25

PT-25-64-**xx**

#### **PTFE Filter Element**

Micron Sizes: 03 and 25

PEL-25-64-**xx**

#### **PEL (Polyethylene) Filter Element**

Micron Sizes: 10, 25, and 75

TRE25-64-**xx**

#### **Adsorption Cartridge**

Adsorbents: CC, 4A, 13X, SG, DR, MB, PP, HO, SB, and CS

Replace "**xxx**" with grade, micron, or adsorbent needed. See [Filter Element Guide](#) for more information.

### Available O-Rings:

**BN360**

**Buna-N (-40°F to 250°F) **\*\*Standard - Included\*\*****

GV360

Viton (-15°F to 400°F)

KZ360


Perfluoroelastomer (5°F to 600°F)

GS360

Silicone (-65°F to 400°F)

GE360

EPDM (-65°F to 300°F)

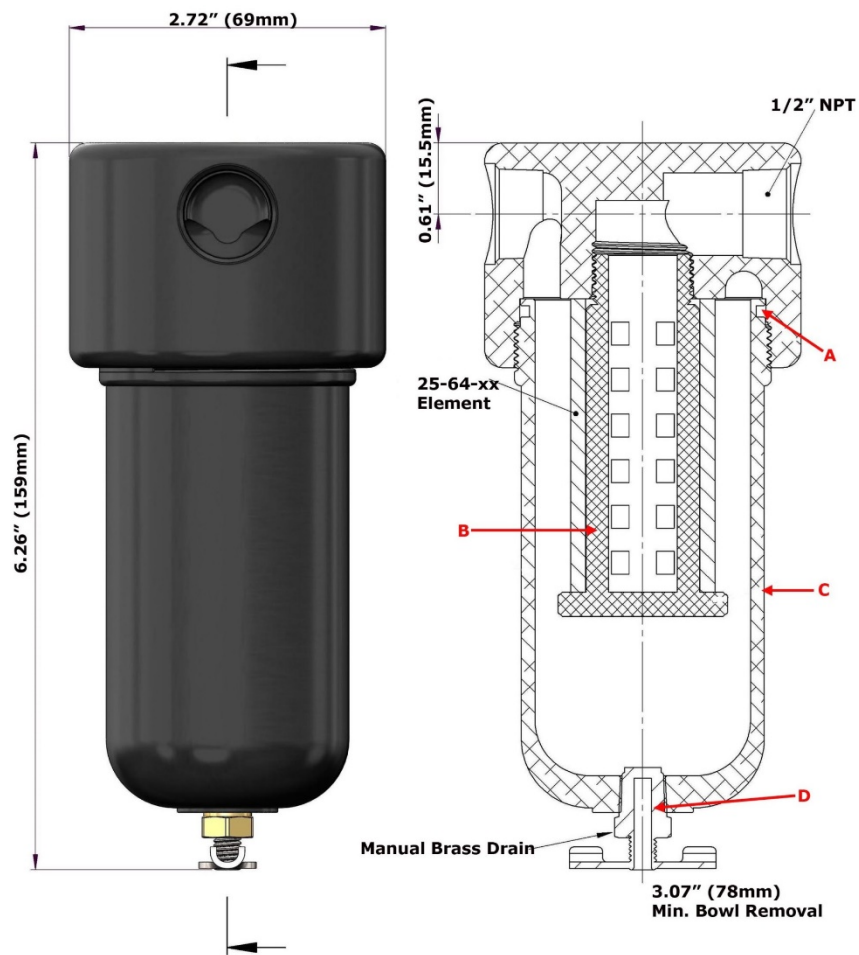

### Replacement Parts:

BN360	Buna-N (-40°F to 250°F) (A) <b>**Standard - Included**</b>
TR360	Nylon Element Retainer (B)
AB360	Anodized Aluminum Bowl (C)
PET300	Brass Manual Petcock (D)

### Accessories:

MBSS360	Stainless Steel Mounting Bracket (M6 x 19 Full Thread on 1.50" Center @ 90° to Port)
---------	---