



Technical Data

- Anodized Aluminum / Polycarbonate Bowl Construction
- 1/2" NPT / Manual Twist Drain
- 150 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 148cc
- Buna-N O-Ring (Standard-Included)
- Total Weight: 1.5 lbs. (Standard Disposable Element Included)
- Flow Rate @ 100 PSIG: 44 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on 25-64-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop


Elements Available:

| | |
|-------------------------|---|
| 25-64- xxx | Disposable Borosilicate Glass Microfiber Filter Element 25-64-70C – Standard Coalescing Filter Element **Included** |
| SS-25-64- xxT | Stainless Steel Filter Element Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200 |
| 25-64- xxxX1 | Reinforced Borosilicate Glass Microfiber Filter Element With Exterior Stainless Steel Cage |
| TRE25-64- xxPLMG | Pleated Micro Glass Filter Element Micron Sizes: 03, 10 and 25 |
| PT-25-64- xx | PTFE Filter Element Micron Sizes: 03 and 25 |
| PEL-25-64- xx | PEL (Polyethylene) Filter Element Micron Sizes: 10, 25, and 75 |

Replace "**xxx**" with grade or micron needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

| | |
|--------------|---|
| BN360 | Buna-N (-40°F to 250°F) **Standard - Included** |
| GV360 | Viton (-15°F to 400°F) |
| KZ360 | Perfluoroelastomer (5°F to 600°F) |
| GS360 | Silicone (-65°F to 400°F) |
| GE360 | EPDM (-65°F to 300°F) |

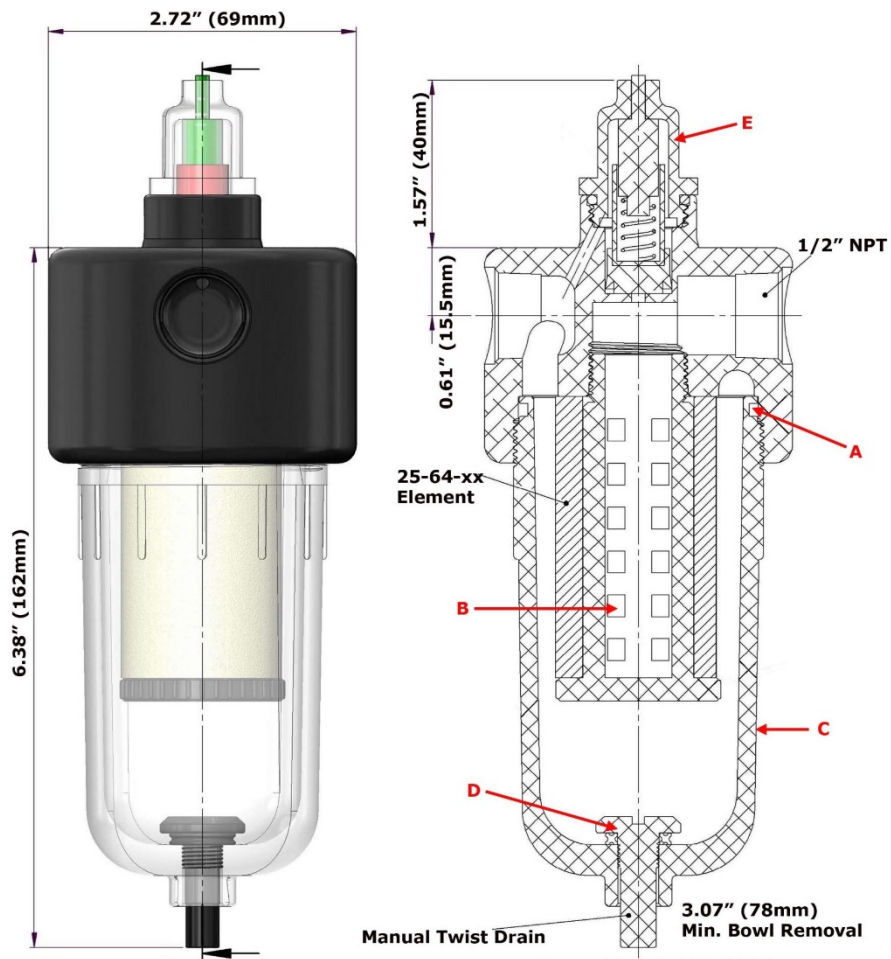

Replacement Parts:

| | |
|--------|--|
| BN360 | Buna-N (-40°F to 250°F) (A) **Standard - Included** |
| TR360 | Nylon Element Retainer (B) |
| PB360 | Polycarbonate Bowl (C) |
| DV360 | Nylon Manual Twist Drain (D) |
| DPB300 | Polycarbonate Differential Pressure Indicator (E) |

Accessories:

| | |
|---------|---|
| MBSS360 | Stainless Steel Mounting Bracket (M6 x 19 Full Thread on 1.50" Center @ 90° to Port) |
|---------|---|