



Model 370AI-1/4"

Technical Data

- Anodized Aluminum Construction
- 1/4" NPT / Brass Manual Petcock Drain
- 150 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 310cc
- Buna-N O-Ring (Standard-Included)
- Total Weight: 1.5 lbs. (Standard Disposable Element Included)
- Flow Rate @ 100 PSIG: 139 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on 25-178-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop


Elements Available:

25-178-xxx	Disposable Borosilicate Glass Microfiber Filter Element 25-178-70C – Standard Coalescing Filter Element **Included**
SS-25-178-xxT	Stainless Steel Filter Element Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200
25-178-xxxX1	Reinforced Borosilicate Glass Microfiber Filter Element With Exterior Stainless Steel Cage
TRE25-178-xxPLMG	Pleated Micro Glass Filter Element Micron Sizes: 03, 10 and 25
PT-25-178-xx	PTFE Filter Element Micron Sizes: 03 and 25
PEL-25-178-xx	PEL (Polyethylene) Filter Element Micron Sizes: 10, 25, and 75

Replace "xxx" with grade or micron needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

BN360	Buna-N (-40°F to 250°F) **Standard - Included**
GV360	Viton (-15°F to 400°F)
KZ360	Perfluoroelastomer (5°F to 600°F)
GS360	Silicone (-65°F to 400°F)
GE360	EPDM (-65°F to 300°F)

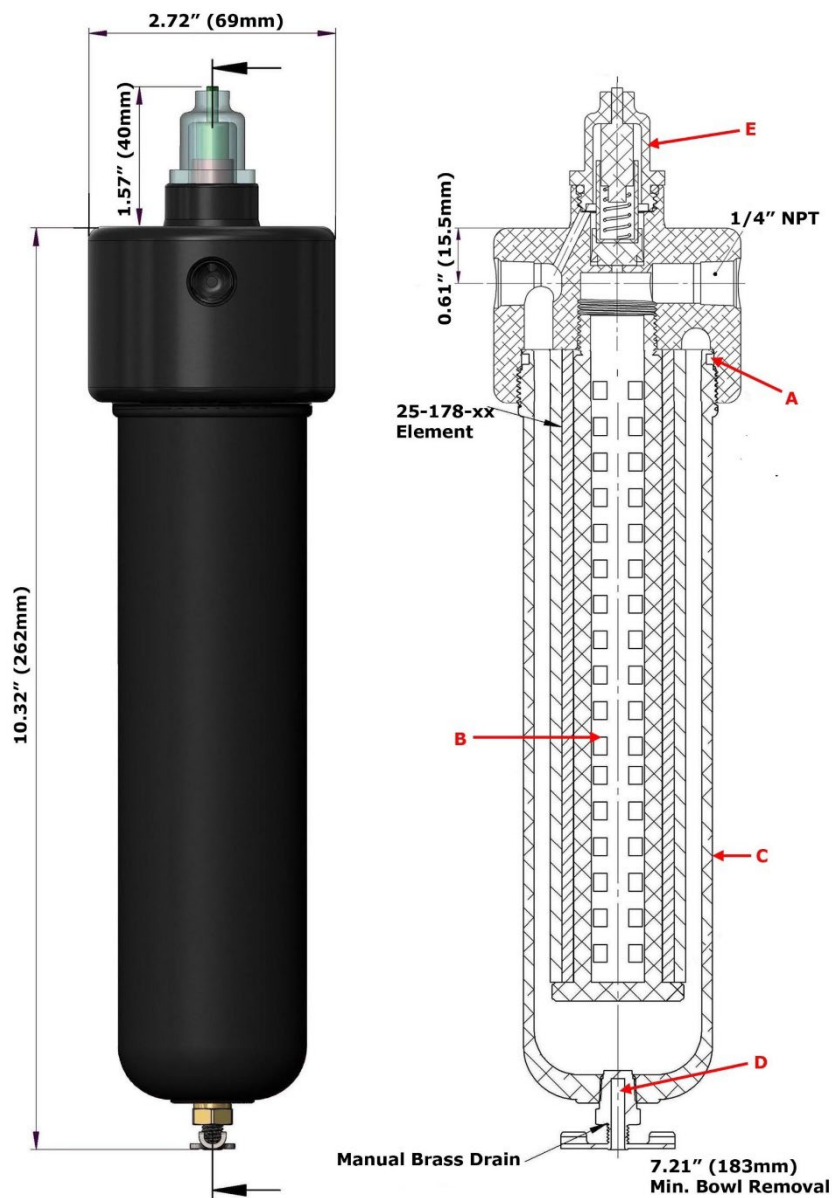

Replacement Parts:

BN360	Buna-N (-40°F to 250°F) (A) **Standard - Included**
TR370	Nylon Element Retainer (B)
AB370	Anodized Aluminum Bowl (C)
PET300	Brass Manual Petcock (D)
DPB300	Polycarbonate Differential Pressure Indicator (E)

Accessories:

MBSS360	Stainless Steel Mounting Bracket (M6 x 19 Full Thread on 1.50" Center @ 90° to Port)
---------	---