



Model 375I

Technical Data

- Anodized Aluminum / Polycarbonate Bowl Construction
- 1/2" NPT / Manual Twist Drain
- 150 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 290cc
- Buna-N O-Ring (Standard-Included)
- Total Weight: 1.5 lbs. (Standard Disposable Element Included)
- Flow Rate @ 100 PSIG: 129 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on 25-178-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop

Elements Available:

25-178-xxx

Disposable Borosilicate Glass Microfiber Filter Element

25-178-70C – Standard Coalescing Filter Element ****Included****

SS-25-178-xxT

Stainless Steel Filter Element

Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering
Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200

25-178-xxxX1

Reinforced Borosilicate Glass Microfiber Filter Element

With Exterior Stainless Steel Cage

TRE25-178-xxPLMG

Pleated Micro Glass Filter Element

Micron Sizes: 03, 10 and 25

PT-25-178-xx

PTFE Filter Element

Micron Sizes: 03 and 25

PEL-25-178-xx

PEL (Polyethylene) Filter Element

Micron Sizes: 10, 25, and 75

Replace "xxx" with grade or micron needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

BN360

Buna-N (-40°F to 250°F) **Standard - Included******

GV360

Viton (-15°F to 400°F)

KZ360


Perfluoroelastomer (5°F to 600°F)

GS360

Silicone (-65°F to 400°F)

GE360

EPDM (-65°F to 300°F)

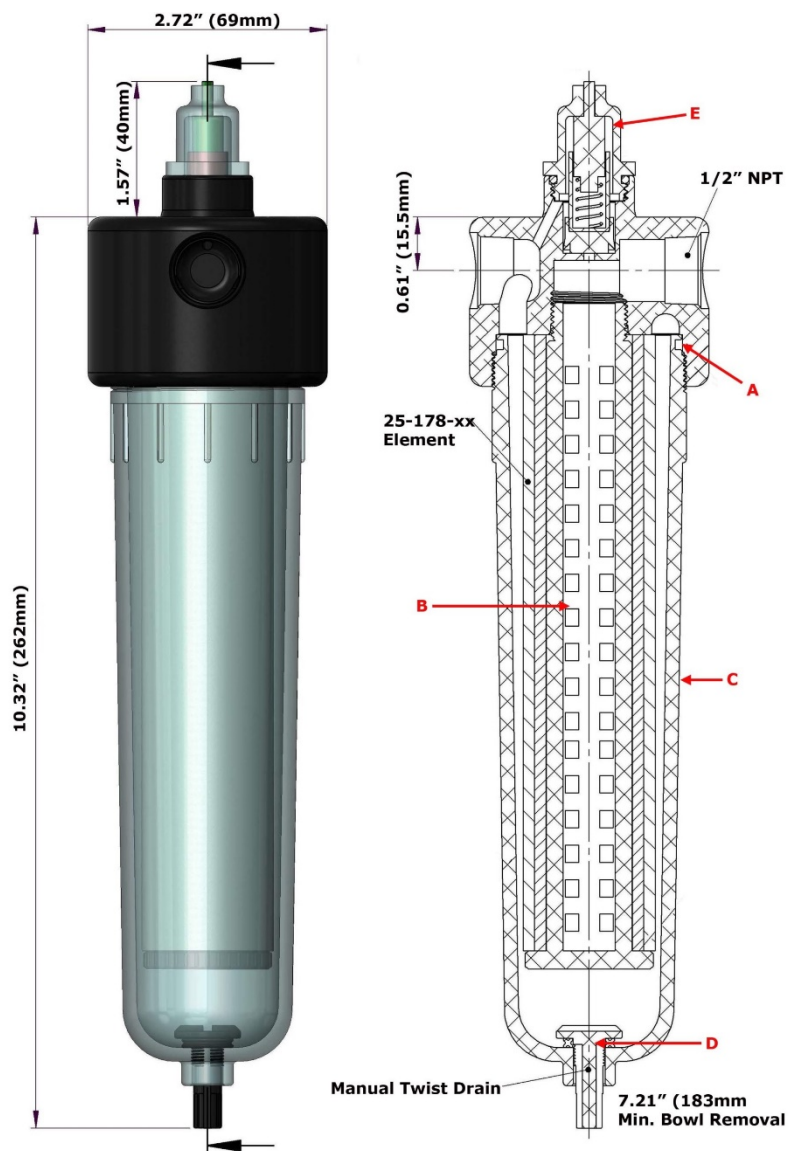

Replacement Parts:

BN360	Buna-N (-40°F to 250°F) (A) **Standard - Included**
TR370	Nylon Element Retainer (B)
PB370	Polycarbonate Bowl (C)
DV360	Nylon Manual Twist Drain (D)
DPB300	Polycarbonate Differential Pressure Indicator (E)

Accessories:

MBSS360	Stainless Steel Mounting Bracket (M6 x 19 Full Thread on 1.50" Center @ 90° to Port)
---------	---