



Model 750N

Technical Data

- Nylon Construction
- 1/4" NPT / No Drain
- 150 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 150cc
- Viton O-Ring (Standard-Included)
- Total Weight: 0.5 lbs.
- Flow Rate @ 100 PSIG: 44 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on 25-64-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop

Elements Available:

25-64-**xxx**

Disposable Borosilicate Glass Microfiber Filter Element

25-64-70C – Standard Coalescing Filter Element

SS-25-64-**xxT**

Stainless Steel Filter Element

Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering
Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200

PT-25-64-**xx**

PTFE Filter Element

Micron Sizes: 03 and 25

PEL-25-64-**xx**

PEL (Polyethylene) Filter Element

Micron Sizes: 10, 25, and 75

Replace "**xxx**" with grade or micron needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

GV760

Viton (-15°F to 400°F) **Standard - Included******

BN760

Buna-N (-40°F to 250°F)

KZ760


Perfluoroelastomer (5°F to 600°F)

GS760

Silicone (-65°F to 400°F)

GE760

EPDM (-65°F to 300°F)

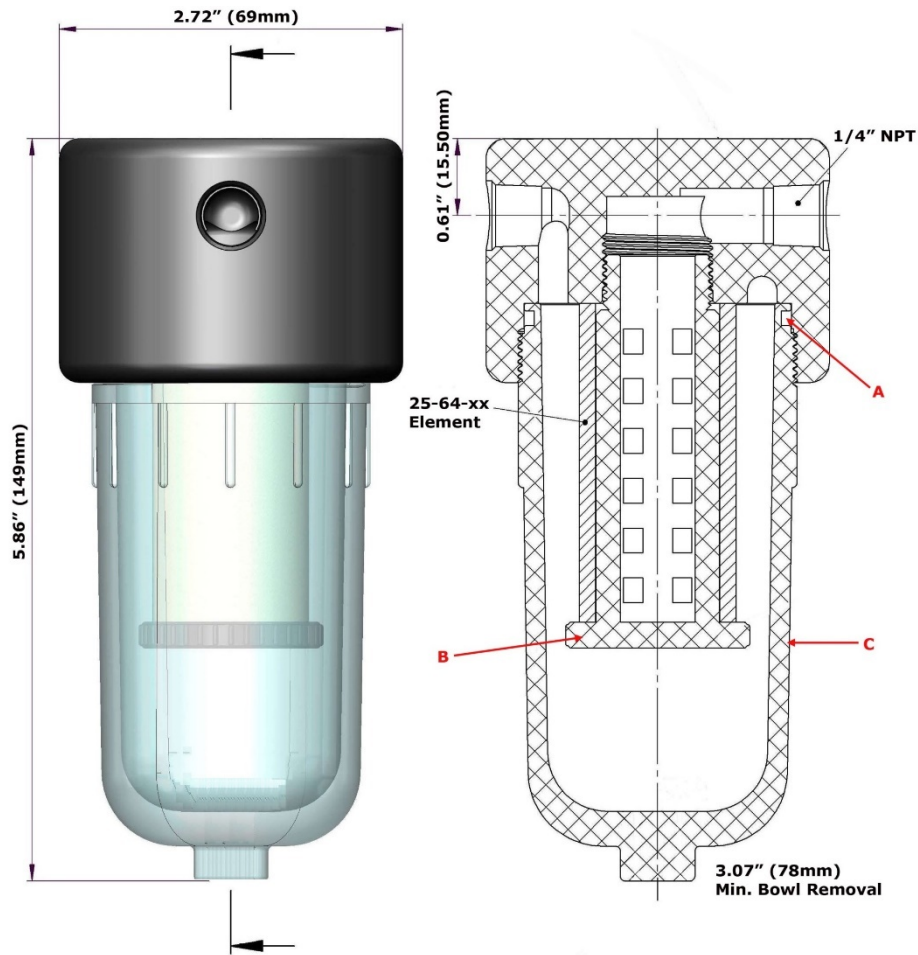

Replacement Parts:

| | |
|-------|---|
| GV760 | Viton (-15°F to 400°F) (A) **Standard - Included** |
| TR360 | Nylon Element Retainer (B) |
| NB755 | Nylon Bowl (C) |

Accessories:

| | |
|---------|---|
| MBSS360 | Stainless Steel Mounting Bracket (M6 x 19 Full Thread on 1.50" Center @ 90° to Port) |
|---------|---|