



## Technical Data

- Nylon Construction
- 1/2" NPT / Manual Twist Drain
- 150 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 150cc
- Viton O-Ring (Standard-Included)
- Total Weight: 0.5 lbs.
- Flow Rate @ 100 PSIG: 44 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
  - Based on 25-64-70C Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
  - Higher flow rates are supported with increased initial pressure drop

### Elements Available:

25-64-**xxx**

#### **Disposable Borosilicate Glass Microfiber Filter Element**

25-64-70C – Standard Coalescing Filter Element

SS-25-64-**xxT**

#### **Stainless Steel Filter Element**

Comes Standard with Teflon Seals "T", Add "V" for optional Viton Seals when Ordering  
Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200

PT-25-64-**xx**

#### **PTFE Filter Element**

Micron Sizes: 03 and 25

PEL-25-64-**xx**

#### **PEL (Polyethylene) Filter Element**

Micron Sizes: 10, 25, and 75

Replace "**xxx**" with grade or micron needed. See [Filter Element Guide](#) for more information.

### Available O-Rings:

**GV760**

**Viton (-15°F to 400°F) **\*\*Standard - Included\*\*****

BN760

Buna-N (-40°F to 250°F)

KZ760


Perfluoroelastomer (5°F to 600°F)

GS760

Silicone (-65°F to 400°F)

GE760

EPDM (-65°F to 300°F)

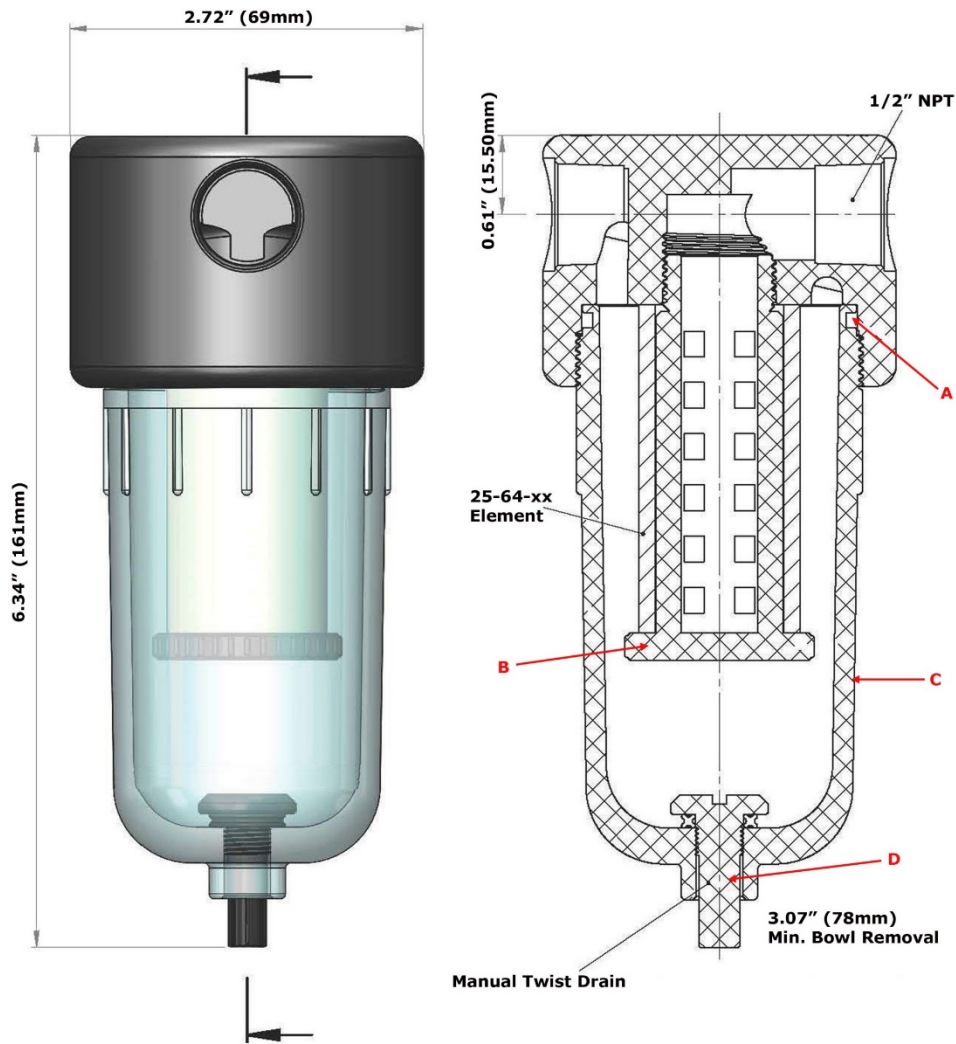

### Replacement Parts:

|       |   |
|-------|---|
| GV760 | Viton (-15°F to 400°F) (A) <b>**Standard - Included**</b> |
| TR360 | Nylon Element Retainer (B)                                |
| NB760 | Nylon Bowl (C)  |
| DV360 | Nylon Manual Twist Drain (D)                              |

### Accessories:

|         |   |
|---------|---|
| MBSS360 | Stainless Steel Mounting Bracket<br>(M6 x 19 Full Thread on 1.50" Center @ 90° to Port) |
|---------|---|