



# DIA-LN / DIA-LK Series


## Technical Data

- 100% Grilamid TR 55 Blue Nylon Construction / Black Kynar
- 1/4" NPT Inlet / Outlet or 1/2" Slip On Connections
- 100 PSIG Maximum Pressure at 110°F
- 230°F Maximum Temp. at 0 PSIG
- Internal Volume (Empty): 120cc
- Air/Gas Flow Rate @ 100 PSIG: 17 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)

### Large Nylon OEM Maximum Flow DIA w/ Media (DIA-LN\_\_) \*add adsorbent required

Our largest DIA is commonly specified where extreme amounts of vapor is present or for remote sites. Larger volume for longer service life.


Replace "\_\_" with grade required  
CC, 4A, 13X, SG, DR, MB, PP, HO, SB, CS

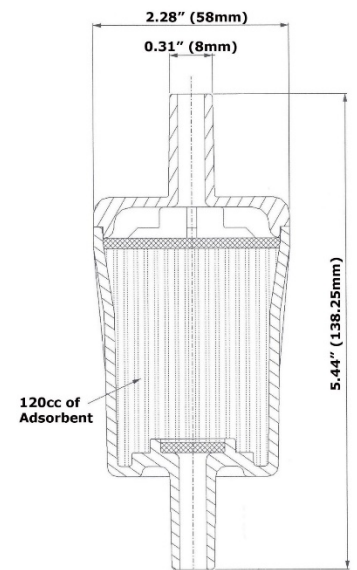

### Large Kynar High Flow DIA for Chemical Compatibility (DIA-LK\_\_) \*add adsorbent required

The DIA-LK assemblies are constructed of black kynar for corrosive applications.

Replace "\_\_" with grade required  
CC, 4A, 13X, SG, DR, MB, PP, HO, SB, CS

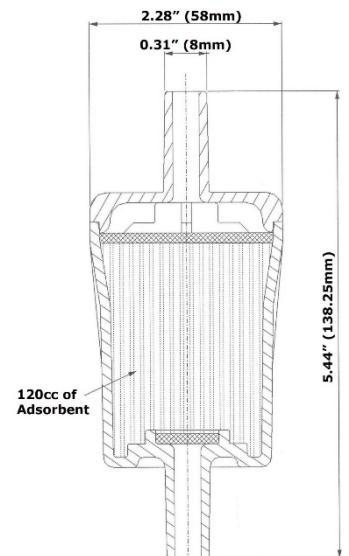

Additional Variations are Available Upon Request

