



Technical Data

- 316L Stainless Steel Construction
- 1/8" NPT / 1/8" NPT Drain
- 1500 PSIG Maximum Pressure
- Internal Volume: 0.3cc (Upstream), 0.8cc (Downstream)
- Viton O-Ring (Standard-Included)
- Total Weight: 1.0 lb.
- Flow Rate: 0.25 LPM (M1 - Low Flow Membrane), 6 LPM (M2- High Flow Membrane)

Elements Available:



MT.19.MxG

Replacement Membrane Kit
Comes Complete with Five Membranes with Viton O-Rings (Bonded Together),
Membrane Options: M1 (Low Flow) or M2 (High Flow)
Replace 'Mx' with membrane required

Available O-Rings:

GVGMS050	Viton (Set of 2) (-15°F to 400°F) **Standard - Included**
BNGMS050	Buna-N (Set of 2) (-40°F to 250°F)
KZGMS050	Perfluoroelastomer (Set of 2) (5°F to 600°F)
GSGMS050	Silicone (Set of 2) (-65°F to 400°F)
GEGMS050	EPDM (Set of 2) (-65°F to 300°F)

O-Ring Kit includes membrane, please specify M1G (Low Flow) or M2G (High Flow).

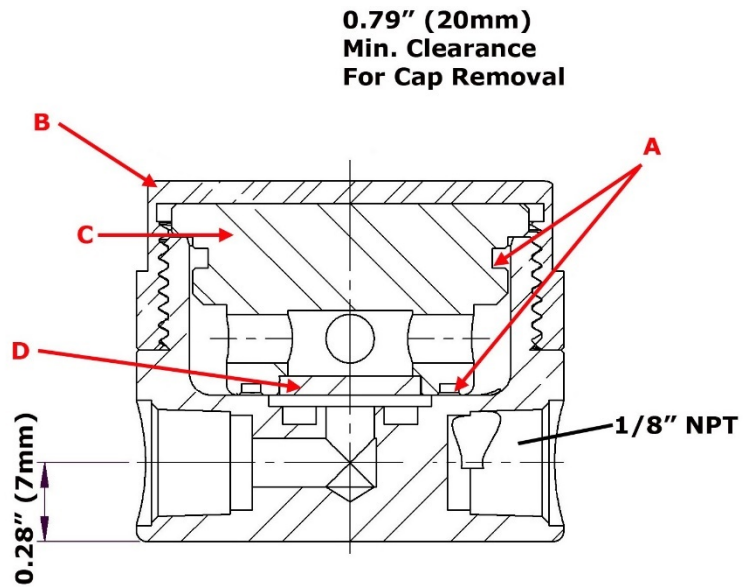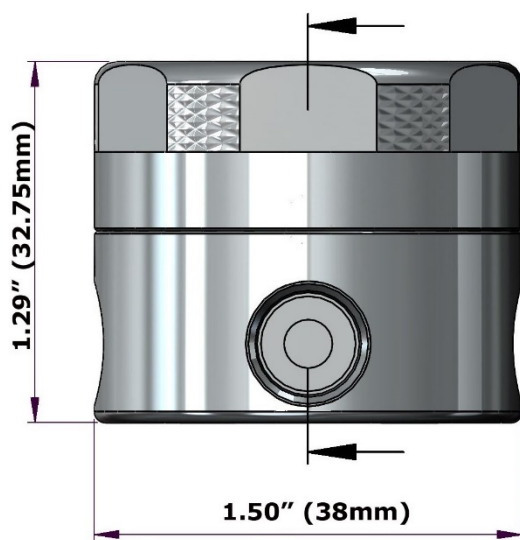

Replacement Parts:

GVGMS050	Viton (Set of 2) (-15°F to 400°F) (A) **Standard - Included**
GMS050-C	Stainless Steel Cap (B)
GMS050-Plug	Stainless Steel Plug Insert (C)
SSGMS050	Stainless Steel Support Disc (D)

Accessories:

MBGMS050	Stainless Steel Mounting Bracket (M5 x 8 Full Thread on 1.00" Center @ 45° to Port)
----------	--

Part Number of Exotic Housing Materials:

Monel A400:	Model GMS050M (Drawing)
Hastelloy C-276:	Model GMS050HC (Drawing)
Inconel A625:	Model GMS050-INC (Drawing)