




## Technical Data

- Anodized Aluminum Construction
- 1/2" NPT
- 250 PSIG Maximum Pressure
- 125°F Maximum Temperature
- Internal Volume: 1600cc

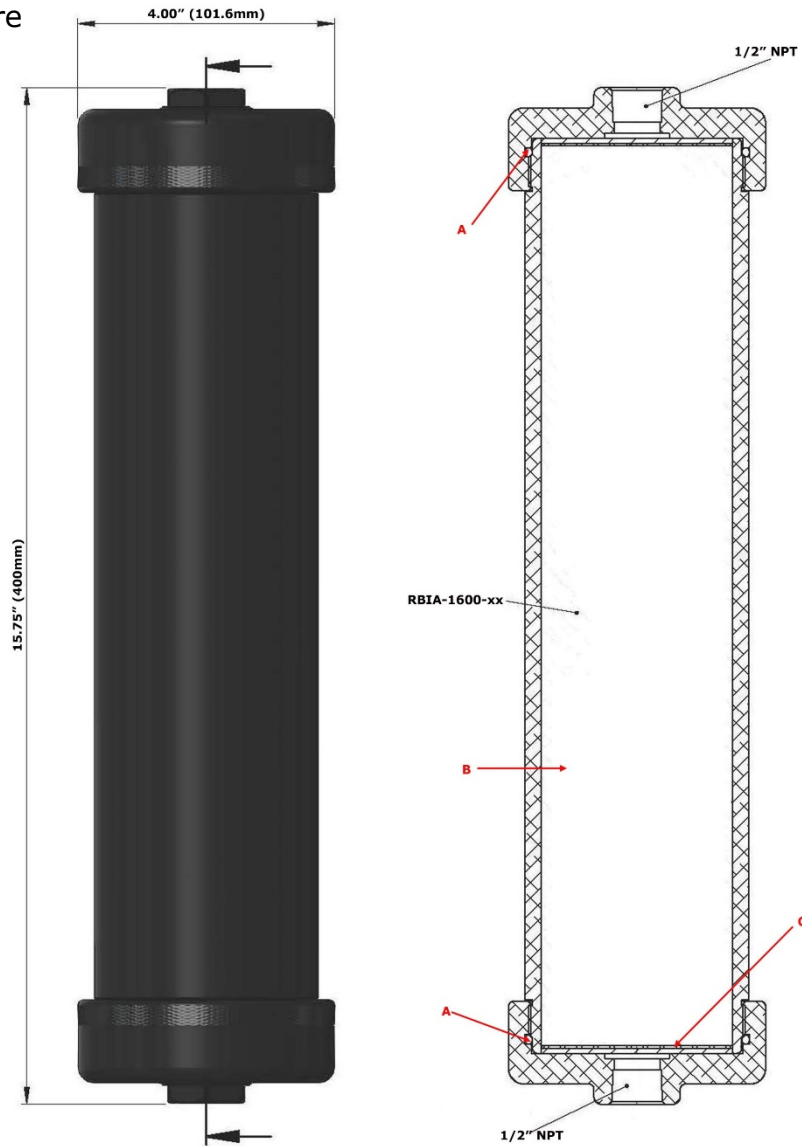

### Replacement Parts:

GV-IAAH

Viton (-15°F to 400°F) (A) **\*\*Standard - Included\*\***

RBIA-1600-xx

Replacement Adsorbent Pack (B)  
Adsorbents: CC, 4A, 13X, SG, DR, MB, PP, HO, SB, and CS

IAAH Kit

IAAH Replacement Kit (C)  
Includes: Two Discs, Two Pads, 1 Spring, and Two SS Frits

Replace "xx" with adsorbent needed.

