



Technical Data

- Carbon Steel Housing with Nickel Coating
- 1" NPT / 1/4" NPT Drain - (Special Order - 3/4" NPT, SAE12, and SAE16 Inlet Ports)
- 5700 PSIG Maximum Pressure
- Internal Volume (with Tie Rod / No Element): 775cc
- Buna-N O-Ring (Standard-Included)
- Total Weight: 26 lbs.
- Flow Rate @ 100 PSIG: 361 SCFM (Maximum Recommended Flow Rate for Optimal Efficiency)
 - Based on SL-38-172-70CSX3 Standard Coalescing Grade Element, 95% Efficient at 0.01 Micron
 - Higher flow rates are supported with increased initial pressure drop


Elements Available:

SL-38-172- xxx X3	Reinforced Borosilicate Glass Microfiber Filter Element With Interior & Exterior Stainless Steel Cages SL-38-172-70CSX3 – Standard Recommended Coalescing Filter Element
SL-SS-51-172- xx	Stainless Steel Filter Element Micron Sizes: 005, 01, 03, 10, 25, 50, 100 and 200
SL-51-172- xx PLMG	Pleated Micro Glass Filter Element Micron Sizes: 03, 10 and 25
SL-38-172- CC X3-100	Carbon Cloth Adsorption Cartridge

Replace “xxx” with grade or micron needed. See [Filter Element Guide](#) for more information.

Available O-Rings:

BNUHPC	Buna-N (-40°F to 250°F) **Standard - Included**
GVUHPC	Viton (-15°F to 400°F)
KZUHPC	Perfluoroelastomer (5°F to 600°F)
GSUHPC	Silicone (-65°F to 400°F)
GEUHPC	EPDM (-65°F to 300°F)

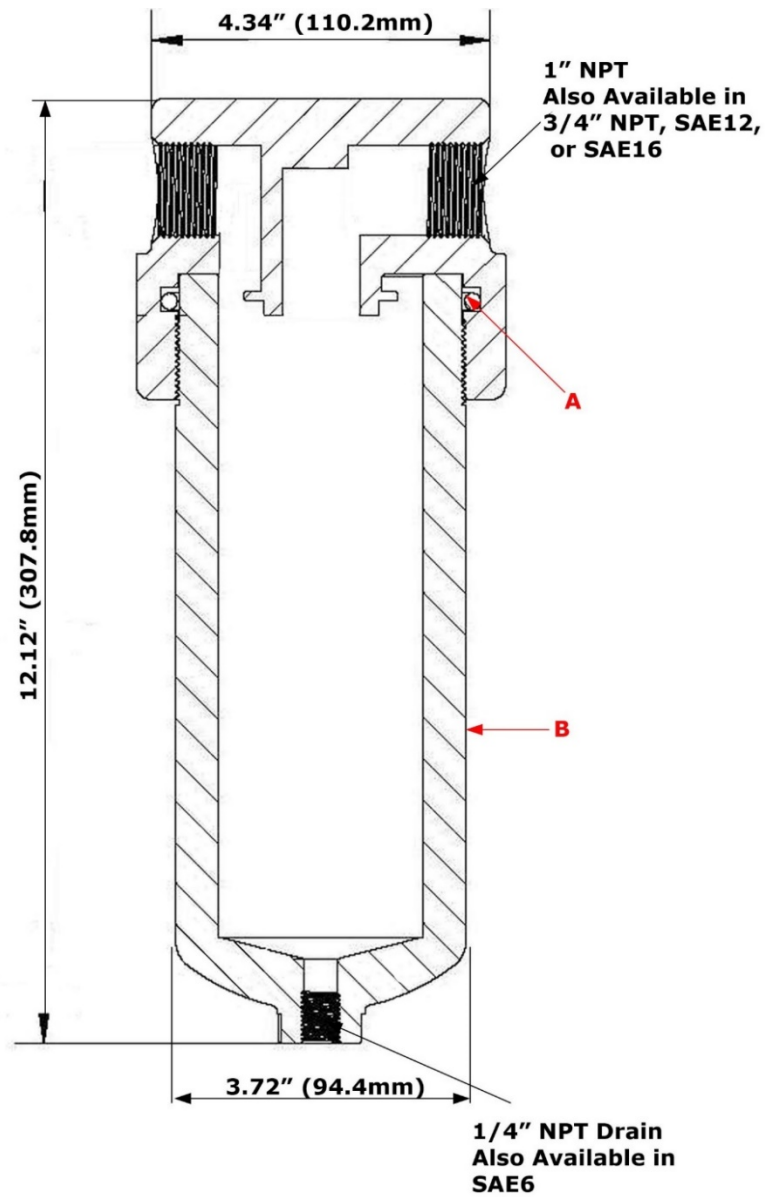

Replacement Parts:

BNUHPC

Buna-N (-40°F to 250°F) **Standard - Included (A)**

CSB-UHPC

Carbon Steel Bowl with Nickel Coating (B)

Accessories:

MBSS150

Stainless Steel Mounting Bracket
(M10-1.5 x 19 Full Thread on 2.50" Center @ 90° to Port)

Canadian Registration Numbers:

- British Columbia – OE18041.51
- Manitoba – OE18041.54
- Maritime Provinces – OE18041.59870YTN
- Ontario – OE18041.5
- Quebec – OE4382.6
- Saskatchewan – CSA-OE18041.56

